


## How to calibrating media by Diagnostic Tool

### 如何使用 Diagnostic Tool 校正紙張

1. Make sure the media is already installed and media cover is closed.  
請確認紙張安裝正確且印字頭關閉。
2. Turn on the printer power switch.  
開啟印表機電源。
3. Open Diagnostic tool and set interface. (The default setting is USB)  
開啟Diagnostic tool工具程式並設定傳輸介面(預設值為USB)。

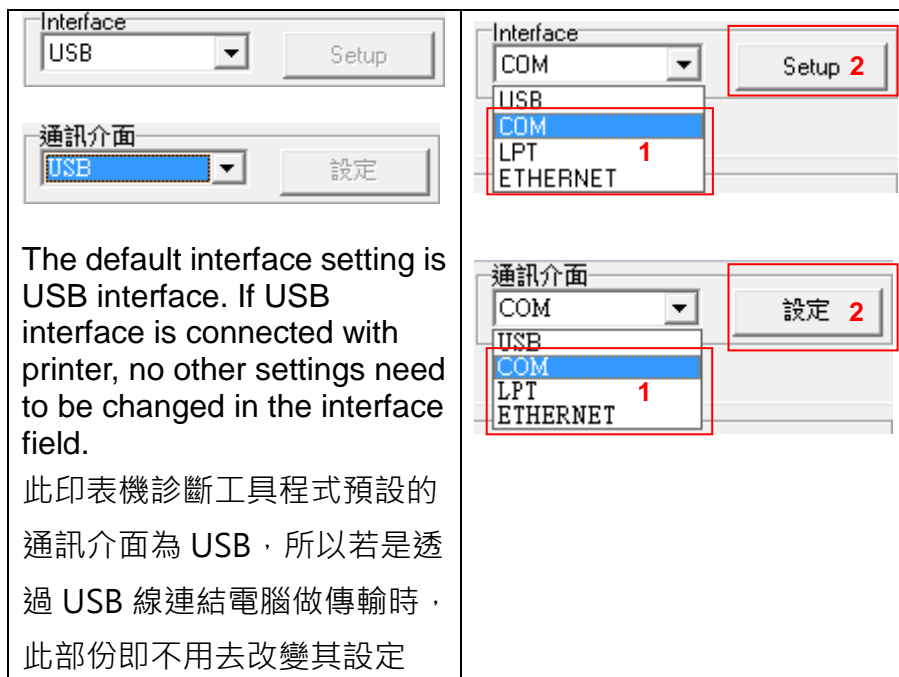

The default interface setting is USB interface. If USB interface is connected with printer, no other settings need to be changed in the interface field.

此印表機診斷工具程式預設的通訊介面為 USB，所以若是透過 USB 線連結電腦做傳輸時，此部份即不用去改變其設定

4. Click the "Calibrate Sensor" button.  
按下 "感應器校正" 鍵。



Printer Function

Calibrate Sensor

Ethernet Setup

RTC Setup

Factory Default

印表機功能

感應器校正

網路設定

RTC設定

印表機初始化

5. Select the media type and click the "Calibrate" button.

選擇紙張類型後按下 "紙張校正" 鍵，此時印表機會自動進紙做校正感應器的動作。

